

# FUEL CELL AND METHOD FOR ITS CONTROL

**Publication number:** WO9637920  
**Publication date:** 1996-11-28  
**Inventor:** OKAMOTO TAKAFUMI (JP)  
**Applicant:** HONDA MOTOR CO LTD (JP); OKAMOTO TAKAFUMI (JP)  
**Classification:**  
- international: H01M8/02; H01M8/04; H01M8/24; H01M8/02; H01M8/04; H01M8/24; (IPC1-7): H01M8/02; H01M8/04; H01M8/06  
- european: H01M8/02B2; H01M8/02C; H01M8/04B4; H01M8/24B2  
**Application number:** WO1996JP01403 19960524  
**Priority number(s):** JP19950126378 19950525; JP19950145884 19950613; JP19950159608 19950626

## Also published as:

EP0833400 (A1)  
US6214486 (B1)  
US6042955 (A1)  
EP0833400 (A4)  
EP0833400 (B1)

more >>

## Cited documents:


JP6020713  
JP6338338  
JP6068898  
JP6275284  
JP2129858

more >>

Report a data error here

### Abstract of WO9637920

Fuel gas and oxidizing gas are supplied through different paths above a first manifold plate (42), a first planar pressure generation plate (44), a separator body (48), a second planar pressure generation plate, a second manifold plate (50), a first gasket (30), a solid polymer electrolyte film (22) and a second gasket (32), while cooling water is supplied from below. This cooling water flows upward in the separator body (48), and it makes the temperature distribution of a fuel cell (20) uniform.

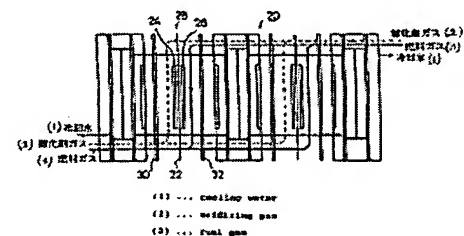

Data supplied from the esp@cenet database - Worldwide